



TEST TECHNOLOGY INTERNATIONAL, INC.

Model 1400

SPECIFICATIONS:

Grid Size: Bottom: 14.4 x 9.6 inches

Points: 13,824 Bottom 100 mil configuration

Test Voltage: 10 – 250 VDC Programmable

Test Resistance:
Isolation
 10 K - 10 M ohms Standard
 100 M ohms *Optional*

Continuity
 10 - 1000 ohms Standard
 1 ohm *Optional*
 5 ohms *Optional*

Test Current: Maximum of 20 mA

Control Unit: MS-DOS Compatible Computer

Ohmega Option: Testing Planar Resistors or Carbon PCB

Data Storage: HDD & 3 1/2" FDD

Test Mode: Open / Short / Ohmega

Test Environment:

Temperature: 50 - 90 °F (10 - 32 °C)

Humidity: Less than 50% non-condensing

Power Supply: 120 VAC, 60 Hz @ 5 AMPS



Printer: 40 Column Dot Matrix


Display: VGA Monitor

Air Supply: 90 - 100 PSI (6 - 7 Kpa) @ 8 CFM

Dimensions: 30 (d) x 52 (w) x 77 (h) inches
 760 (d) x 1320 (w) x 1950 (h) mm

Weight: 1400 lbs. (640 kgs) Approx.

“A Commitment to Cost Effective Test Solutions!”

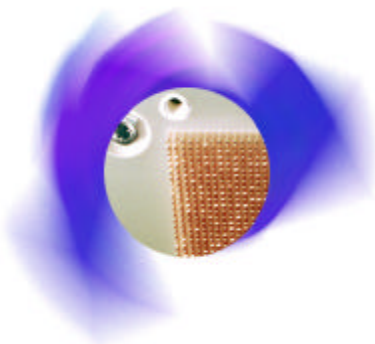

Test Technology International, Inc.
 1601 Fairview Drive
 Carson City, NV 89701
 Tel: +1 (775) 885-8015
 FAX: +1 (775) 885-8028
 E-mail: test@ttiusa.com