



TEST TECHNOLOGY INTERNATIONAL, INC.

Model 3400

SPECIFICATIONS:

Grid Size: Bottom: Up to 24.0 x 18.4 inches

Points: Up to 44,160 Bottom 100 mil configuration

Test Voltage: 10 – 250 VDC Programmable

Test Resistance:

Isolation

10 K - 10 M ohms Standard

100 M ohms *Optional*

Continuity

10 - 1000 ohms Standard

1 ohm *Optional*

5 ohms *Optional*

Test Current: Maximum of 20 mA

Control Unit: MS-DOS Compatible Computer

Ohmega Option: Testing Planar Resistors or Carbon PCB

Data Storage: HDD & 3 1/2" FDD


Test Mode: Open / Short / Ohmega

Test Environment:

Temperature: 50 - 90 °F (10 - 32 °C)

Humidity: Less than 50% non-condensing

Power Supply: 120 VAC, 60 Hz @ 20 AMPS

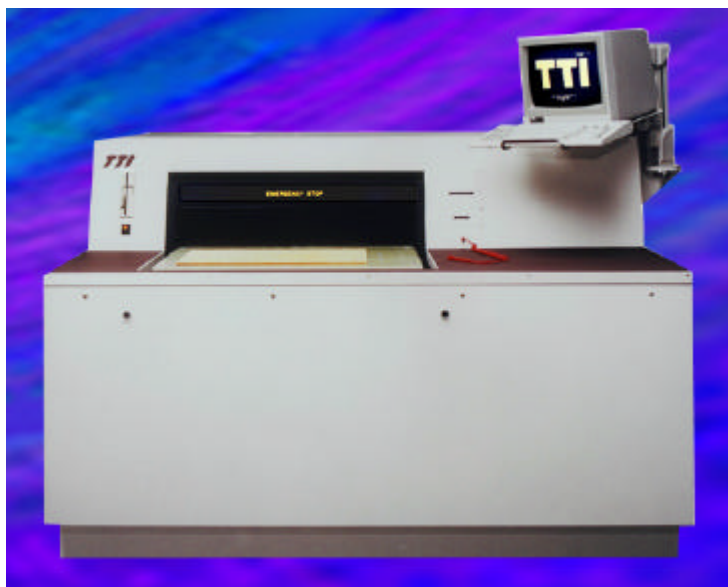

Printer: 40 Column Dot Matrix

Display: VGA Monitor

Air Supply: Not Required

Dimensions: 74 (d) x 67 (w) x 50 (h) inches
1850 (d) x 1675 (w) x 1250 (h) mm

Weight: 3500 lbs. (1590 kgs) Approx.

“A Commitment to Cost Effective Test Solutions!”

Test Technology International, Inc.
1601 Fairview Drive
Carson City, NV 89701
Tel: +1 (775) 885-8015
FAX: +1 (775) 885-8028
E-mail: test@ttiusa.com

